

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 September 2003 (12.09.2003)


PCT

(10) International Publication Number
WO 03/074156 A1

- (51) International Patent Classification⁷: **B01D 45/08**, 45/16, 50/00
- (21) International Application Number: PCT/EP03/02303
- (22) International Filing Date: 5 March 2003 (05.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1020113 5 March 2002 (05.03.2002) NL
- (71) Applicant (for all designated States except US): **STATOIL ASA** [NO/NO]; Forusbeen 50, Forus East, N-4035 Stavanger (NO).
- (71) Applicant (for MG only): **TRANSLATECH BV** [NL/NL]; Sophiastraat 42, NL-4811 EM Breda (NL).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **HÅLAND, Trygve** [NO/NO]; Skibmannsveilen 26, N-4056 Tananger (NO). **LARNHOLM, Per-Reidar** [NO/NO]; Refsnestranda 1, N-1518 Moss (NO).
- (74) Agent: **HYLARIDES, Paul, Jacques**; Arnold & Siedsma, Sweelinckplein 1, NL-2517 GK The Hague (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR TREATING A GAS/LIQUID MIXTURE

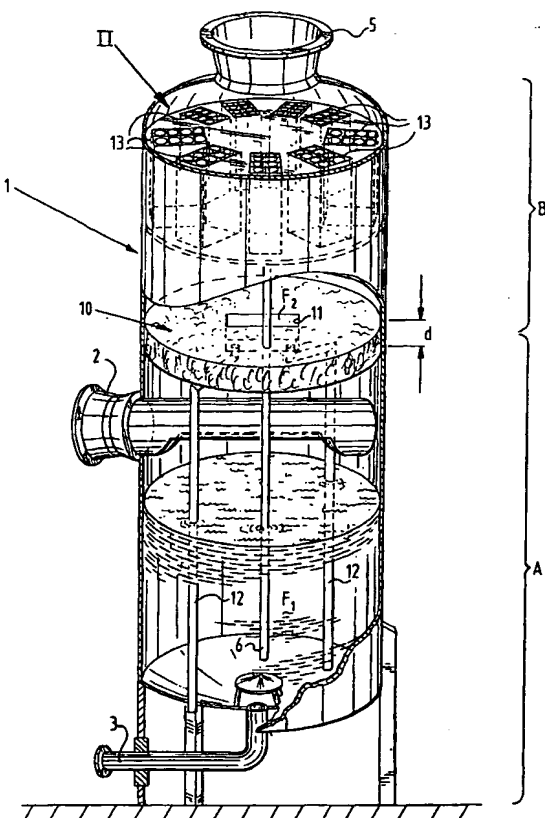

(57) Abstract: The present invention relates to a device for treating a gas/liquid mixture, comprising: - an upright vessel (1) with a lower and upper compartment; - an inlet (2) for admitting the flow of mixture into the lower compartment; - an agglomerating unit (10) placed between the lower and upper compartment for enlarging the liquid droplets in the mixture; - a lower outlet (4) for discharging the substantially liquid-containing mixture part from the lower compartment; - an upper outlet (5) for discharging the substantially gas-containing mixture part from the upper compartment; characterized by - collecting means (11) for collecting on the downstream side of the agglomerating unit liquid droplets which have broken through the agglomerating unit; - recycling means (12) for recycling the collected liquid to the lower compartment from the collecting means.

WO 03/074156 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

DEVICE AND METHOD FOR TREATING A GAS/LIQUID MIXTURE

The present invention relates to a device and method for
5 treating a gas/liquid mixture, and in particular to the
separation of mixtures of oil, water and/or gas.

In the oil and gas industry separators are known for
separating the supplied mixture of liquid (oil and/or water)
and gas into a stream of substantially gas and a stream of
10 substantially liquid. Different separators are known for
separating such gas/liquid mixtures.

Known from EP 0 195 464 A1 is a separator consisting of
an upright column (upright vessel), a lower part of which is
separated from an upper part by a "demister" or "coalescer"
15 of a mesh of wires, also referred to as a "mesh pad". The
lower part forms a lower compartment into which is fed the
gas/liquid mixture for treating, while optionally being pre-
treated. During infeed a part of the liquid is already
separated from the mixture. This liquid accumulates at the
20 bottom of the lower compartment.

The remaining part of the gas/liquid mixture is then
guided through the wire mesh. The liquid droplets in the
mixture for guiding through the wire mesh collide with the
wires and grow therewith into a liquid layer. If the speed of
25 the supplied gas/liquid mixture is sufficiently low, the
liquid from the liquid layer will drop back under the
influence of the force of gravity into the lower compartment
and fall into the liquid already present there. A discharge
is connected to the lower compartment for draining liquid,
30 while in the upper compartment a discharge is connected for
draining the gas/liquid mixture remaining after the demister.

The known demisters have a relatively small pressure
drop and a high separating efficiency, wherein the very small
liquid droplets can also be separated from the gas. At
35 relatively low gas velocities the liquid removed from the gas
showers downward from the demister under the influence of
gravity. At higher gas velocities some of the liquid droplets
are entrained by the upward flowing gas and carried along in

upward direction from the demister. However, because a liquid layer is created on top of the demister at higher gas velocities, flooding limits the maximum flow rate of the demister in the standard configuration. At a determined
5 liquid and gas load the mesh will break through, which means that the mesh becomes supersaturated with liquid and a part of the liquid penetrates through the mesh and flows upward on the downstream side of the mesh. Such a breakthrough results in the separation of liquid from the gas/liquid mixture being
10 impeded.

In light of the foregoing, the processing capacity of the conventional demister remains limited, and a demister suitable for a determined processing capacity is relatively large.

15 It is an object of the present invention to obviate at least one of the above stated drawbacks and other drawbacks associated with the prior art separators, and to provide an improved method and device wherein the liquid treatment capacity as well as the gas treatment capacity can be
20 considerably increased.

According to a first aspect, the present invention relates to a device for treating a gas/liquid mixture, comprising:

- an upright vessel with a lower and upper compartment;
- 25 - an inlet for admitting the flow of mixture into the lower compartment;
- an agglomerating unit placed between the lower and upper compartment for enlarging the liquid droplets in the mixture;
- 30 - collecting means for collecting on the downstream side of the agglomerating unit liquid droplets which have broken through the agglomerating unit;
- recycling means for recycling the collected liquid to the lower compartment from the collecting means;
- 35 - a lower outlet for discharging the substantially liquid-containing mixture part from the lower compartment;
- an upper outlet for discharging the substantially gas-containing mixture part from the upper compartment.

The agglomerating unit causes agglomeration of the liquid, i.e. collecting or accumulating of the liquid in relatively large liquid droplets. The agglomerating unit is preferably embodied in a mesh, for instance in the form of a number of layers of metal gauze. Other types of agglomerating units can however also be applied, such as one or more layers of structured packing or of vanes or vane packs. Any porous medium with a porosity of 80 to 99.9% is in fact suitable. The mesh according to the invention is designed to function in a flooded condition. The liquid permeating through the mesh as a result of supersaturation forms a bubbling mass above the downstream agglomerating unit surface. In order to prevent too much liquid collecting above the agglomerating unit surface and the distribution of the liquid displacing to the further separator still being adversely affected, the liquid is discharged via the collecting means and recycling means. The determining factor for the separating capacity is now no longer the saturation point of the mesh, but the (larger) capacity of the collecting and discharging means.

There will moreover be an increase in the total separating efficiency, i.e. the efficiency of the agglomerating unit in combination with an optional separator arranged downstream. The agglomerating unit has the result that the dimensions of the downstream liquid droplet are enlarged, which increases the separating efficiency of an optional downstream separator such as a cyclone separator. The agglomerating unit will moreover equalize a possibly irregular distribution on the upstream surface of the mesh, which increases the separating efficiency of the downstream cyclone separator.

In a preferred embodiment of the invention the device comprises a separator arranged in the upper compartment downstream of the agglomerating unit for further separating the mixture into a substantially liquid-containing mixture part and a substantially gas-containing mixture part. The separator preferably comprises one or more cyclone separators, wherein the inflowing mixture is set into a rotating movement, whereby a heavy fraction, in which a

relatively large amount of liquid is present, is flung against the outer wall of the cyclone and is discharged via openings in the side wall.

In a particularly advantageous embodiment the separator
5 comprises one or more axial recycle cyclones, the liquid discharge of which extends from the separator to below the liquid level in the lower compartment. Such axial recycle cyclones with very high separation efficiency are known from WO 00/25931, the content of which should be deemed as
10 interpolated herein. Described herein is an installation wherein a number of boxes with cyclones are arranged above the vessel. These cyclones are axial recycle cyclones. The installation comprises a liquid discharge conduit or "downcomer" for carrying the liquid to the underside of the
15 vessel. The outlet nozzle of the liquid discharge conduit has to be situated below the liquid level in order to form a liquid trap and to prevent bypass of gas.

In order to ensure that the breakthrough of liquid through the mesh is uniform, i.e. that the breakthrough
20 occurs all at once and substantially over the whole cross-section of the agglomerating unit, and the distribution of the mixture downstream of the agglomerating unit is distributed uniformly over the cross-section of the vessel, in a further preferred embodiment of the invention the
25 agglomerating unit comprises a substantially horizontally extending layer of mesh and, in an even more preferred embodiment, the agglomerating unit has a substantially constant layer thickness.

In a preferred embodiment the collecting means and the
30 recycling means comprise at least one collecting reservoir extending in the agglomerating unit for collecting the broken-through liquid therein, and one or more discharge conduits extending from the collecting reservoir to below the level of the liquid collected in the lower compartment. The
35 collecting and recycling means are integrated into the mesh. The collecting reservoir or collecting trough with the discharge conduit runs through the mesh, whereby the downstream side of the mesh is connected to the upstream

side. The exact geometry of the draining system, for instance the number and the form of the collecting reservoirs and recycle conduits, is determined by the liquid and gas load for processing.

5 In a further preferred embodiment the inlet is moreover connected to a pre-treatment unit for carrying out a first liquid/gas separation. The effect of the subsequent treatments by the agglomerating unit and the separator unit is hereby increased. A pre-treatment unit can be formed by a
10 device which is placed on the inlet stub of a separating vessel and which is provided with a number of curved blades which uniformly absorb the moment of the incoming gas-liquid flow. The blades then guide the gas-liquid flow laterally into the lower compartment of the separating vessel. As a
15 result of this controlled inflow of the gas-liquid mixture, a first part of the liquid will already be separated whereby the liquid load on the agglomerating unit and separator mounted downstream is considerably reduced.

The pre-treatment unit preferably comprises one or more
20 inlet cyclone separators arranged in the lower compartment. With such a pre-treatment the impact of the inlet flow can be limited, a part of the liquid can already be separated and a more uniform distribution of the mixture flow falling onto the mesh can be brought about, which enhances the overall
25 separating efficiency.

It has been found that for an efficient discharge of the liquid droplet downstream of the agglomerating unit, at a relatively small pressure loss as a result of limiting the through-flow surface area due to the presence of the
30 collecting and discharging means, the collecting means are arranged over about 15% of the cross-section of the vessel.

A characteristic measure for the breakthrough point defined by the breakthrough of the liquid is the so-called K-value. The K-value is proportional to the gas velocity
35 multiplied by the root of the ratio of the gas density to the density difference of gas-liquid. If the K-value is high, the conventional mesh becomes supersaturated and will then no longer function correctly. The K-value is therefore kept low

in a conventional mesh. Limitation of the K-value however also entails a limitation of the separating capacity of the device, which in turn results in relatively large separators. While in the known devices breakthrough of the mesh is always prevented by keeping the K-value low, in practice less than about 0.1, it is precisely the case according to the invention that a break through the mesh has to occur. The mesh applied according to the invention is therefore embodied to allow the supplied liquid to break through from a minimum K-value of about 0.1.

Another aspect of the present invention relates to a method for treating a gas/liquid mixture in an upright vessel with a lower and upper compartment, comprising of:

- feeding the gas/liquid flow into the lower compartment of the column;
- guiding the gas/liquid flow through an agglomerating unit arranged between the lower and upper compartment at high speed such that liquid breaks through to a position beyond the downstream surface of the agglomerating unit;
- collecting the broken-through liquid;
- recycling the collected liquid to the lower compartment;
- discharging the mixture from the lower compartment;
- discharging the mixture from the upper compartment.

The breaking of the liquid through a mesh takes place at a K-value of at least 0.1. The supplied gas/liquid mixture must therefore have a K-value of at least 0.1 to bring about a break through the mesh.

An advantageous embodiment of the method further comprises of further separating the mixture in the upper compartment by guiding the mixture through one or more cyclone separators and carrying the separated liquid part to the lower compartment and the separated gas part to the upper outlet, preferably combined with pre-treating the introduced gas/liquid flow for separating a part of the liquid from the gas/liquid mixture.

Further advantages, features and details of the present invention will follow from the description of two preferred

embodiments thereof. Reference is made in the description to the figures, in which:

- figure 1 shows a partly schematic perspective view of an installation for separating a gas/liquid mixture, wherein
5 a preferred embodiment of the device according to the present invention is applied;

- figure 2 shows a top view in detail of the preferred embodiment of figure 1;

- figure 3 shows a cross-section through a mesh
10 according to the invention;

- figure 4 is a top view of a further embodiment of a mesh according to the invention;

- figure 5 is a partly cut-away perspective view of detail II of figure 1.

15 Figure 1 shows a separating vessel (separating column) 1 for separating a supplied gas/liquid mixture, such as natural gas mixed with (salt sea-)water, into a substantially gas-containing fraction, also referred to as light fraction, and a substantially liquid-containing fraction (water and/or
20 oil), also referred to as heavy fraction. Vessel 1 is provided with a connecting stub 2 for infeed of the gas/liquid mixture, a connecting stub for a liquid discharge conduit 4 for discharge of liquid and a connecting stub 5 for discharge of substantially gas.

25 Via a pre-treatment unit 3 the introduced gas/liquid mixture is guided to a lower compartment A of vessel 1. In the shown embodiment the pre-treatment unit 3 consists of a tube provided on the underside with an opening. This opening ensures that the supplied mixture is driven under high
30 pressure in the direction of the bottom of the vessel. At the bottom of vessel 1 the liquid \bar{F} is collected and drained via a conduit 4.

In a preferred embodiment (not shown) the pre-treatment unit is formed by a device provided with a number of curved
35 blades which uniformly absorb the moment of the incoming gas/liquid flow. This device is known in the field as the "schoepentoeter" (vane feed inlet). The blades subsequently guide the gas/liquid flow laterally into the lower

compartment of the separating vessel. As a result of this controlled entry of the gas/liquid mixture a first part of the liquid will already be separated and accumulate at the bottom of vessel 1. It is however advantageous to embody the pre-treatment unit in the form of one or more inlet cyclones. Such inlet cyclones are for instance known from the publication WO 00/74815 A2 of the present applicant, the content of which should be deemed as interpolated herein. In such cyclones the inflowing mixture is set into a rotating movement, whereby the heavy fraction, in which a relatively large amount of liquid is present, is flung against the outer wall of the cyclone and comes to lie at the bottom of separating vessel 1, and whereby the light fraction, in which a relatively large amount of gas is present, is guided upward.

The separated part of the mixture which, although it contains less liquid than the mixture supplied from outside, still has a considerable liquid content, is then guided at high speed through a layer of tightly packed wires, also referred to as a wire mesh 10. This mesh 10 is disposed horizontally in vessel 1 and thereby forms a separation between lower compartment A and upper compartment B of vessel 1.

A detailed top view of such a wire mesh 10 is shown in figure 2. Provided in the upper surface of mesh 10 is a collecting trough or collecting reservoir 11 in which liquid F_2 can be collected. Via two discharge conduits 12 extending below the level of liquid F_1 at the bottom of the lower compartment, the collected liquid F_2 can be carried to the lower compartment A of vessel 1, where the liquid can be drained via discharge conduit 4.

The mesh according to the invention is designed to function in a flooded condition. This means that the velocity of the supplied mixture is so high that the liquid from the mixture breaks through the mesh and forms a bubbling mass above the mesh surface.

The breaking of the liquid through the mesh is dependent on a number of parameters, such as the velocity of the

supplied gas, the density of the gas and the density of the liquid. A characteristic measure known in the field for breaking through a mesh is the K-value. The K-value is proportional to the gas velocity multiplied by the root of the ratio of the gas density to the density difference of gas-liquid.

At an increasing velocity of the mixture the liquid saturating plane will displace increasingly further upward (for instance from a position v_1 to a position v_2 , figure 3). The mesh is disposed horizontally and moreover has a practically constant thickness d (between 100 and 200 mm) to ensure that the saturating plane extends substantially parallel to the outer surface of the mesh. Once the saturating plane has reached the upper surface of the mesh and a breakthrough occurs, the breakthrough will thereby take place uniformly over the whole upper surface. In the case of a varying thickness or a non-horizontal arrangement, breakthrough would only occur on a limited part of the upper surface, while no breakthrough would take place at the position of the remaining part. Such a partial breakthrough results in an irregular distribution of the mixture downstream of the mesh, which has a negative effect on the separation efficiency of the separator disposed downstream.

It has been found that if the K-value is greater than about 0.1, breakthrough will occur. In order to now prevent too much liquid accumulating above the mesh surface and the distribution of the mixture displacing upward downstream still being adversely affected, the liquid is collected via the above mentioned collecting reservoir 11 and carried via discharge conduits 12 to the lower compartment A.

Shown in figure 4 is another preferred embodiment in which the collecting trough 11' is placed centrally in the middle of the mesh pad, and only one discharge conduit 12' is provided for draining liquid. For an optimal agglomerating action of mesh pad 10 the cross-sectional surface area of collecting trough 11, 11' relative to the cross-sectional surface area of mesh pad 10 should be between 5% and 25%, and preferably around 15%.

The mixture which is displaced further upward, in which mixture a relatively large amount of gas and liquid is present in relatively large droplets, is further separated by a number of cyclone separators. A number of boxes 13 is
5 arranged for this purpose in upper compartment B of vessel 1 (figure 1). Provided downstream thereof is the connecting stub 5 for discharging the gas which is dried to a considerable extent. Boxes 13 are each separately or jointly provided with a downcomer 6 which is in communication with
10 liquid F_1 at the bottom of the vessel for draining liquid from each of the boxes.

Eight cyclones 14 are arranged in each of the boxes 13. In a particularly effective embodiment these are axial recycle cyclones. Figure 5, which is practically the same as
15 figure 2 of the aforementioned document WO 00/25931, shows a box 13 provided with a number of cyclones. A cyclone comprises a cylindrical wall 15 which forms on the underside an inlet for the gas/liquid mixture and has an outflow opening 16 on the upper side thereof. Roughly centrally in
20 the space enclosed by the cylindrical wall is placed a so-called swirl element 17 which is provided with blades 18 for setting the mixture into rotating movement. A part of the mixture is flung outward by this rotating movement and transported via an interspace 19 to a recycle conduit 20.
25 Recycle conduit 20 extends through swirl-element 17. Further connected to the space between wall 15 and the wall of the box is a conduit 21 for draining liquid, which conduit debouches onto a ring line 22 into which drain conduits of other cyclones debouch on one side and downcomer 6 is
30 connected on the other side to the space at the bottom of the vessel for collecting liquid F. The separation efficiency of the type of axial recycle cyclone in combination with mesh 10 described herein has been found to be particularly high, which enables among other things a compact embodiment of the
35 installation.

The present invention is not limited to the above described embodiments thereof; the rights sought are defined by the following claims, within the scope of which many

modifications can be envisaged.

CLAIMS

1. Device for treating a gas/liquid mixture, comprising:
 - an upright vessel with a lower and upper compartment;
 - an inlet for admitting the flow of mixture into the lower compartment;
 - 5 - an agglomerating unit placed between the lower and upper compartment for enlarging the liquid droplets in the mixture;
 - a lower outlet for discharging the substantially liquid-containing mixture part from the lower compartment;
 - 10 - an upper outlet for discharging the substantially gas-containing mixture part from the upper compartment;

characterized by

 - collecting means for collecting on the downstream side of the agglomerating unit liquid droplets which have broken
15 through the agglomerating unit;
 - recycling means for recycling the collected liquid to the lower compartment from the collecting means.
2. Device as claimed in claim 1, wherein the collecting means are arranged over substantially 15% of the cross-
20 section of the vessel.
3. Device as claimed in either of the foregoing claims, wherein the mesh is embodied to allow the supplied liquid to break through from a minimum K-value of about 0.1.
4. Device as claimed in any of the claims 1-3, wherein
25 the collecting means comprise at least one collecting reservoir extending in the agglomerating unit for collecting the broken-through liquid therein, and wherein recycling means comprise a discharge conduit
extending from the collecting reservoir to below the level of
30 the liquid collected in the lower compartment.
5. Device as claimed in any of the foregoing claims, wherein the agglomerating unit comprises a wire mesh.
6. Device as claimed in any of the foregoing claims, wherein the agglomerating unit extends substantially
35 horizontally.

7. Device as claimed in any of the foregoing claims, wherein the agglomerating unit extends over substantially the whole cross-section of the upright column.

8. Device as claimed in any of the foregoing claims, wherein the thickness of the agglomerating unit is substantially constant.

9. Device as claimed in any of the foregoing claims, comprising a separator arranged in the upper compartment downstream of the agglomerating unit for further separating the mixture into a substantially liquid-containing mixture part and a substantially gas-containing mixture part.

10. Device as claimed in claim 9, wherein the separator comprises one or more cyclone separators.

11. Device as claimed in any of the claims 9-10, wherein the separator comprises one or more axial recycle cyclones, the liquid discharge of which extends from the separator to below the liquid level in the lower compartment.

12. Device as claimed in any of the foregoing claims, wherein the inlet is connected to a pre-treatment unit for carrying out a first liquid/gas separation, which pre-treatment unit comprises an inlet cyclone separator arranged in the lower compartment.

13. Method for treating a gas/liquid mixture in an upright vessel with a lower and upper compartment, comprising of:

- feeding the gas/liquid flow into the lower compartment of the column;
- guiding the gas/liquid flow through an agglomerating unit arranged between the lower and upper compartment at high speed such that liquid breaks through to a position beyond the downstream surface of the agglomerating unit;
- collecting the broken-through liquid;
- recycling the collected liquid to the lower compartment;
- discharging the mixture from the lower compartment;
- discharging the mixture from the upper compartment.

14. Method as claimed in claim 13, wherein the K-value of the supplied mixture amounts to at least 0.1.

15. Method as claimed in claim 13 or 14, comprising of further separating the mixture in the upper compartment by guiding the mixture through one or more cyclone separators and carrying the separated liquid part to the lower 5compartment and the separated gas part to the upper outlet.

16. Method as claimed in any of the claims 13-15, comprising of pre-treating the introduced gas/liquid flow for separating a part of the liquid from the gas/liquid mixture, wherein the pretreatment comprises of guiding the introduced 10gas/liquid mixture through one or more inlet cyclones.

17. Method as claimed in any of the claims 13-16, to be performed in a device as claimed in any of the claims 1-12.

18. Device or method as claimed in any of the foregoing claims, wherein the liquid contains oil and/or water.

AMENDED CLAIMS

[received by the International Bureau on 31 July 2003 (31.07.03)
claims 1-18 replaced by claims 1-19 (5 pages)]

1. Device for treating a gas/liquid mixture,
comprising:

- an upright vessel with a lower and upper
compartment;

5 - an inlet for admitting the flow of mixture into the
lower compartment;

- an agglomerating unit placed between the lower and
upper compartment for enlarging the liquid droplets in the
mixture;

10 - a separator arranged in the upper compartment
downstream of the agglomerating unit for further separating
the mixture into a substantially liquid-containing mixture
part and a substantially gas-containing mixture part.

- a lower outlet for discharging the substantially
15 liquid-containing mixture part from the lower compartment;

- an upper outlet for discharging the substantially
gas-containing mixture part from the upper compartment;

characterized by

- collecting means for collecting in or downstream
20 the agglomerating unit the liquid droplets which have broken
through the agglomerating unit;

- recycling means for recycling the collected liquid
from the collecting means to the lower compartment.

25 2. Device for treating a gas/liquid mixture,
comprising:

- an upright vessel with a lower and upper compartment;

- an inlet for admitting the flow of mixture into the
lower compartment;

- an agglomerating unit placed between the lower and upper compartment for enlarging the liquid droplets in the mixture;

- a lower outlet for discharging the substantially liquid-containing mixture part from the lower compartment;

- an upper outlet for discharging the substantially gas-containing mixture part from the upper compartment;

characterized by

- collecting means for collecting on the downstream side of the agglomerating unit liquid droplets which have broken through the agglomerating unit;

- recycling means for recycling the collected liquid to the lower compartment from the collecting means.

3. Device according to claim 1 or 2, wherein the agglomerating unit comprises a wire mesh.

4. Device as claimed in any of the claims 1-3, wherein the collecting means comprise at least one collecting reservoir extending in the agglomerating unit for collecting the broken-through liquid therein, and wherein recycling means comprise a discharge conduit extending from the collecting reservoir to below the level of the liquid collected in the lower compartment.

5. Device as claimed in claim 1 or 2, wherein the collecting means are arranged over substantially 15% of the cross-section of the vessel.

6. Device as claimed in either of the foregoing claims 3-5, wherein the mesh is embodied to allow the supplied liquid to break through from a minimum K-value of about 0.1.

7. Device as claimed in any of the foregoing claims, wherein the agglomerating unit extends substantially horizontally.

8. Device as claimed in any of the foregoing claims, wherein the agglomerating unit extends over substantially the whole cross-section of the upright column.

9. Device as claimed in any of the foregoing claims,
5 wherein the thickness of the agglomerating unit is substantially constant.

10. Device as claimed in claim 1, wherein the separator comprises one or more cyclone separators.

11. Device as claimed in claim 1 or 10, wherein the
10 separator comprises one or more axial recycle cyclones, the liquid discharge of which extends from the separator to below the liquid level in the lower compartment.

12. Device as claimed in any of the foregoing claims, wherein the inlet is connected to a pre-treatment unit for
15 carrying out a first liquid/gas separation, which pre-treatment unit comprises an inlet cyclone separator arranged in the lower compartment.

13. Method for treating a gas/liquid mixture in an upright vessel with a lower and upper compartment, comprising
20 of:

- feeding the gas/liquid flow into the lower compartment of the column;

- guiding the gas/liquid flow through an agglomerating unit arranged between the lower and upper
25 compartment at high speed such that liquid breaks through to a position beyond the downstream surface of the agglomerating unit;

- collecting the broken-through liquid;
- recycling the collected liquid to the lower
30 compartment;

- guiding the mixture through a separator in the upper compartment for further separating the mixture into a

substantially liquid-containing mixture part and a substantially gas-containing mixture part;

- discharging the mixture from the lower compartment and discharging the mixture from the upper compartment.

5 14. Method for treating a gas/liquid mixture in an upright vessel with a lower and upper compartment, comprising of:

- feeding the gas/liquid flow into the lower compartment of the column;

10 - guiding the gas/liquid flow through an agglomerating unit arranged between the lower and upper compartment at high speed such that liquid breaks through to a position beyond the downstream surface of the agglomerating unit;

15 - collecting the broken-through liquid;

- recycling the collected liquid to the lower compartment;

- discharging the mixture from the lower compartment;

- discharging the mixture from the upper compartment.


20 15. Method as claimed in claim 13 or 14, wherein the K-value of the supplied mixture amounts to at least 0.1.

16. Method as claimed in claim 13, 14 or 15, comprising of further separating the mixture in the upper compartment by guiding the mixture through one or more cyclone separators and carrying the separated liquid part to the lower compartment and the separated gas part to the upper outlet.

25 17. Method as claimed in any of the claims 13-16, comprising of pre-treating the introduced gas/liquid flow for separating a part of the liquid from the gas/liquid mixture, wherein the pretreatment comprises of guiding the introduced gas/liquid mixture through one or more inlet cyclones.

18. Method as claimed in any of the claims 13-17, to be performed in a device as claimed in any of the claims 1-12.

19. Device or method as claimed in any of the
5 foregoing claims, wherein the liquid contains oil and/or water.

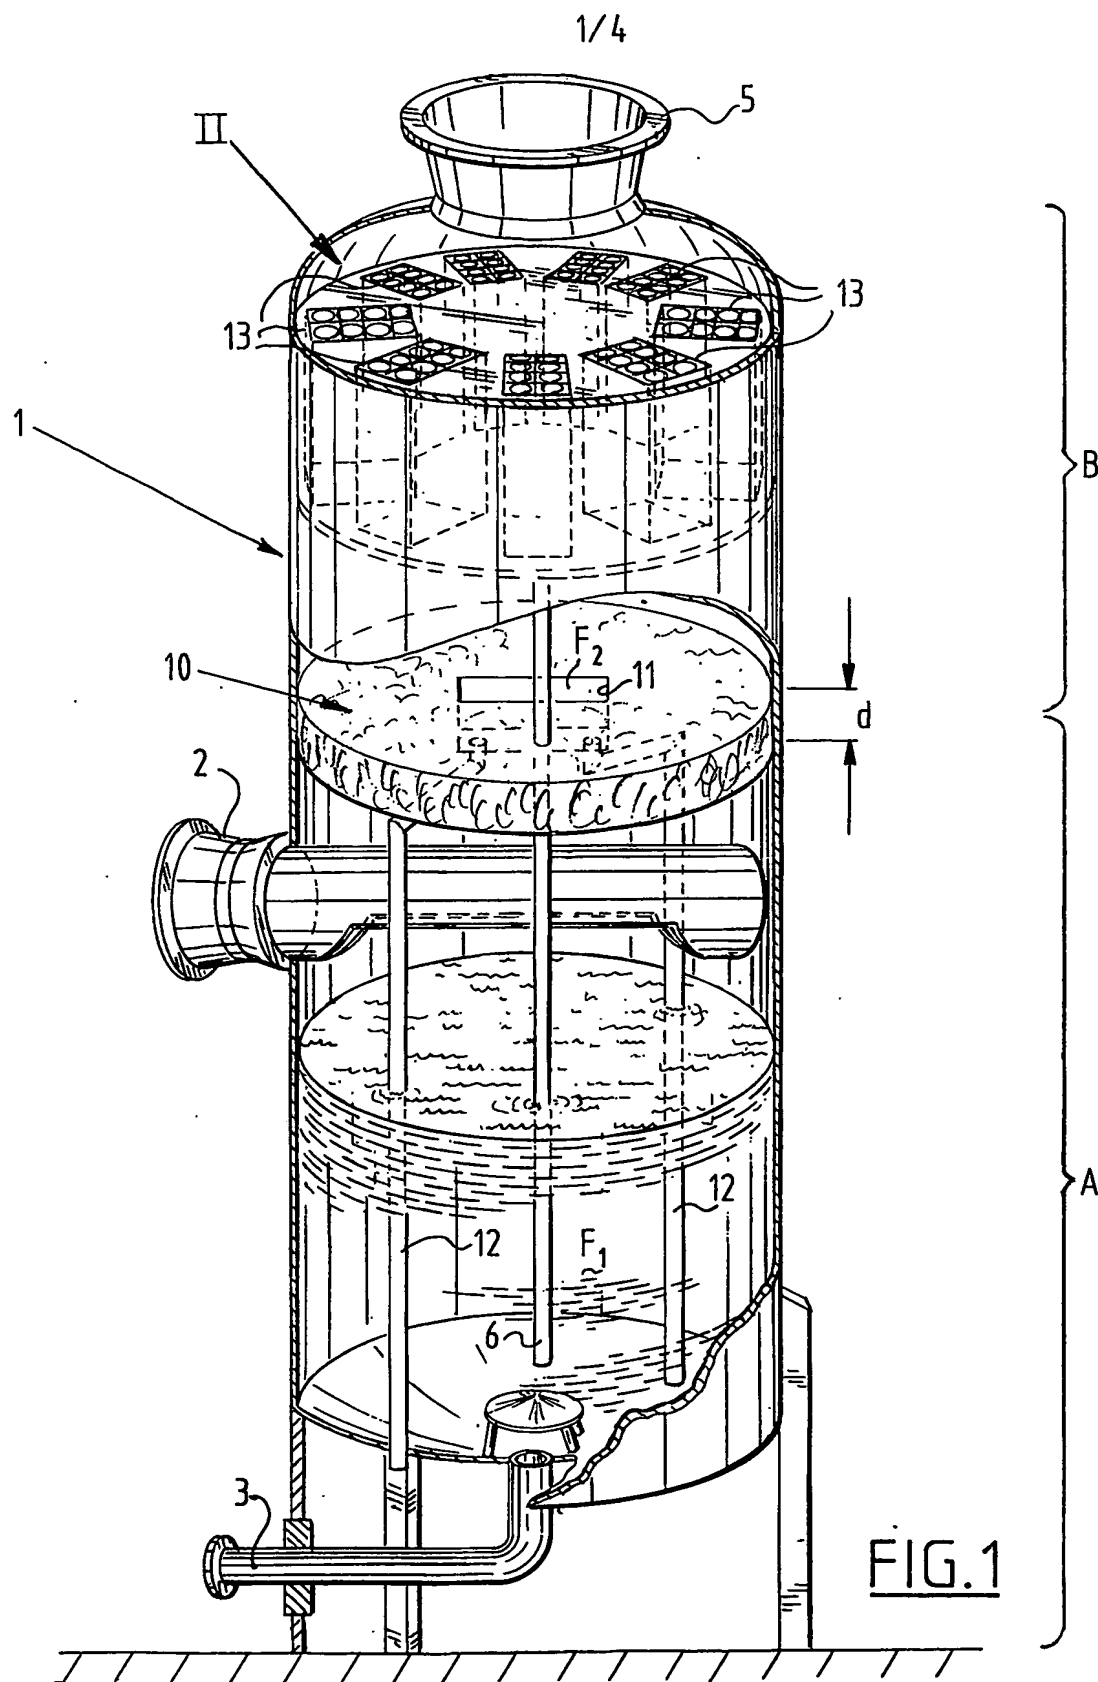

2/4

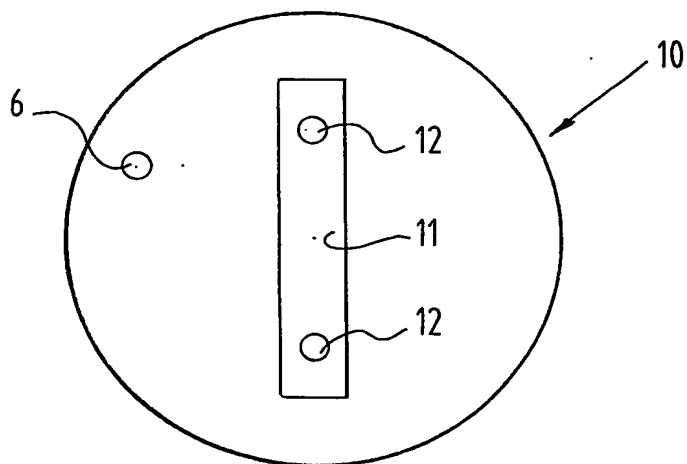


FIG. 2

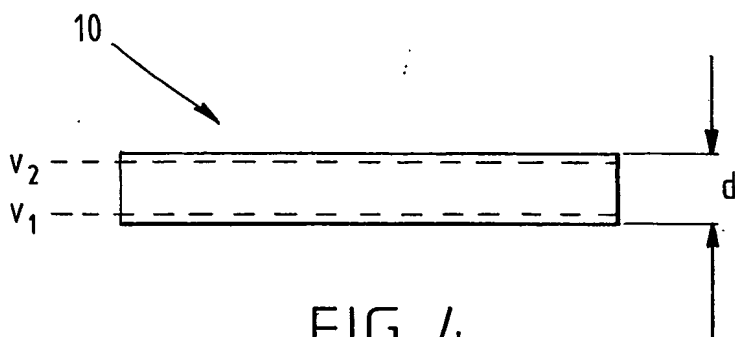


FIG. 4

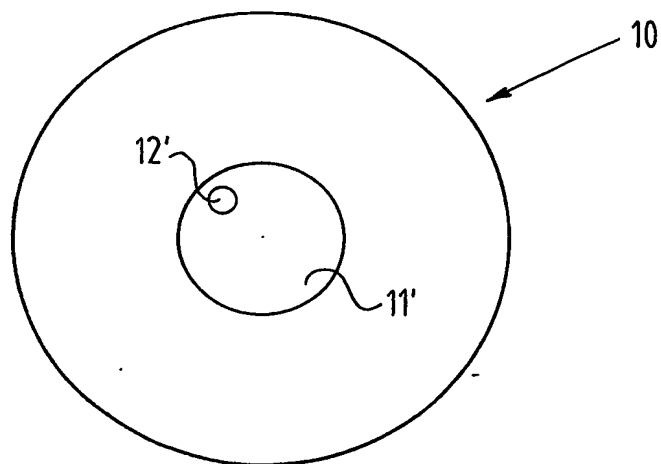
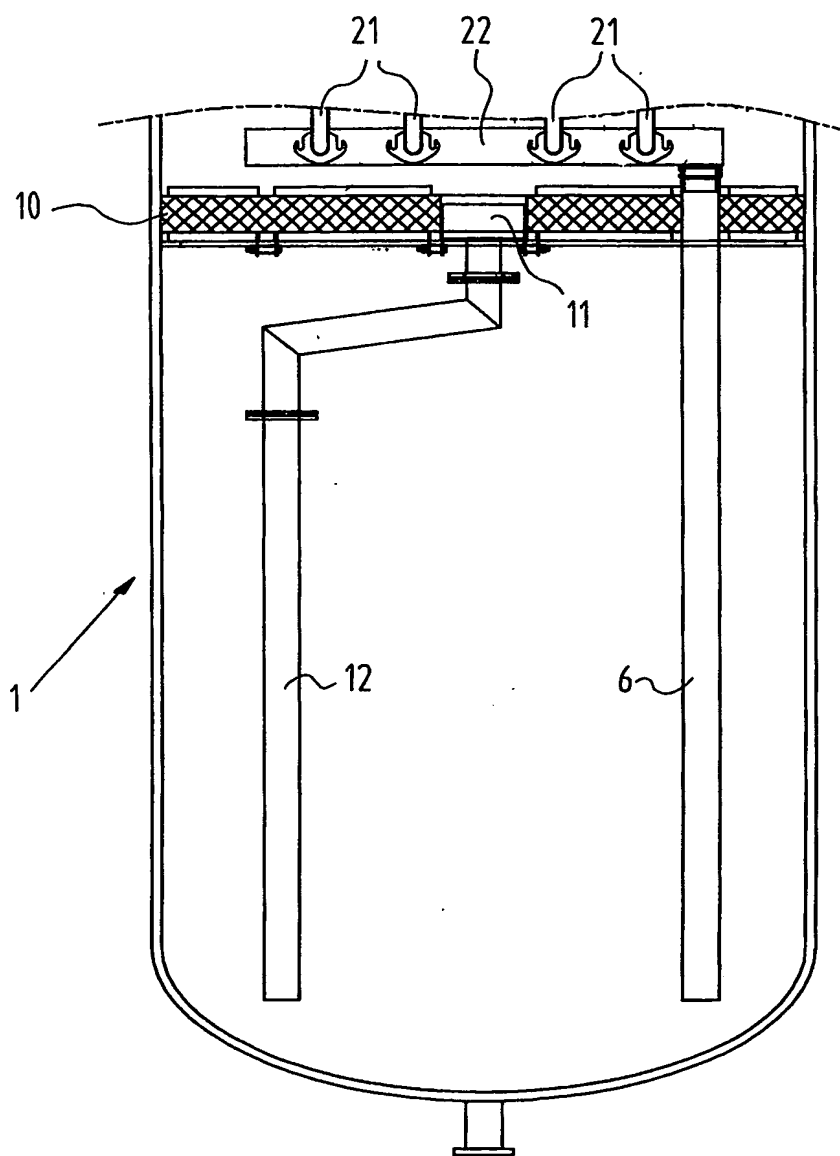
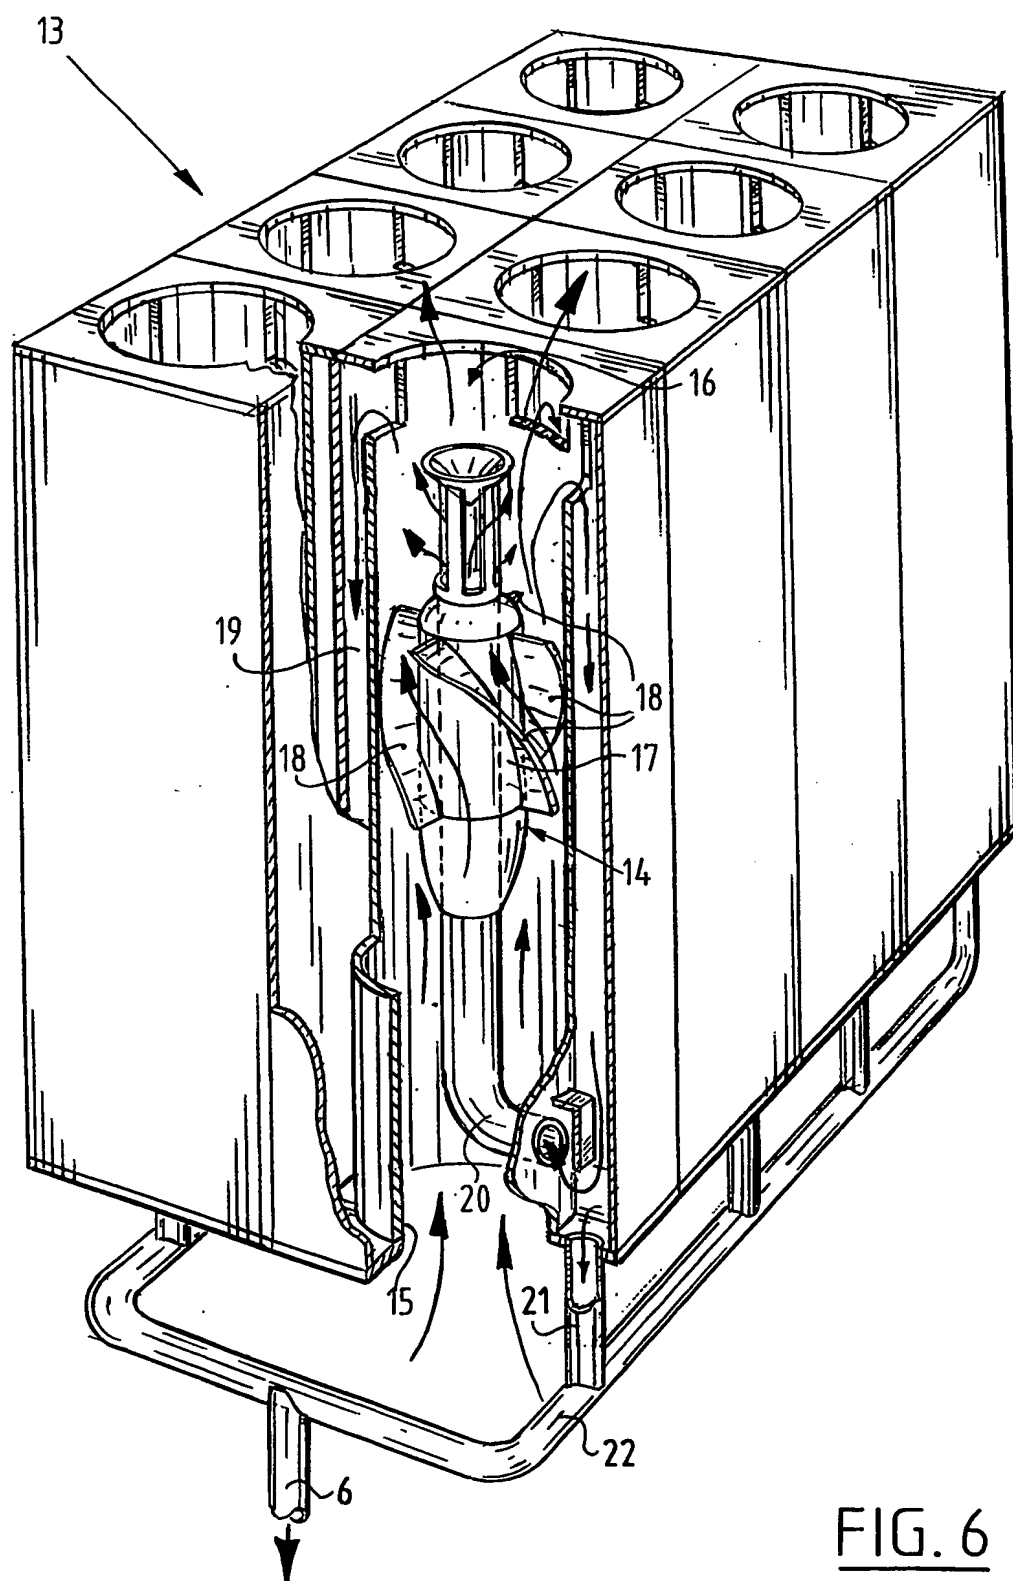


FIG. 5

3/4

FIG. 3

4/4

FIG. 6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02303

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01D45/08 B01D45/16 B01D50/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 195 464 A (SHELL) 24 September 1986 (1986-09-24) cited in the application page 5, line 16 -page 8, line 15	1, 3, 5-11, 18
Y A	--- WO 00 74815 A (SWANBORN) 14 December 2000 (2000-12-14) cited in the application page 7, line 18 -page 10, line 32	12 13, 15, 17
Y	--- US 6 251 168 B1 (BIRMINGHAM ET AL) 26 June 2001 (2001-06-26) column 4, line 45 -column 6, line 12	12
X A	--- US 3 010 537 A (BAKER ET AL) 28 November 1961 (1961-11-28) column 1, line 70 -column 5, line 17	1-3, 5, 6, 8-10, 12 13, 15-18
X	--- -/--	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

24 June 2003

Date of mailing of the international search report

01/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Doolan, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02303

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DD 257 826 A (VEB) 29 June 1988 (1988-06-29) the whole document -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/02303

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 195464	A	24-09-1986	AU 577927 B2	06-10-1988
			AU 5421286 A	16-10-1986
			CA 1286233 C	16-07-1991
			DE 3662839 D1	24-05-1989
			DK 95986 A	06-09-1986
			EG 17664 A	30-03-1991
			EP 0195464 A1	24-09-1986
			JP 1839666 C	25-04-1994
			JP 5054365 B	12-08-1993
			JP 61204017 A	10-09-1986
			NO 860784 A ,B,	08-09-1986
			NZ 215346 A	31-03-1987
			US 4767424 A	30-08-1988
WO 0074815	A	14-12-2000	NL 1012245 C2	06-12-2000
			AU 5431300 A	28-12-2000
			DE 20023079 U1	13-03-2003
			EP 1187667 A2	20-03-2002
			WO 0074815 A2	14-12-2000
			NO 20015925 A	04-02-2002
US 6251168	B1	26-06-2001	CA 2313903 A1	23-01-2001
US 3010537	A	28-11-1961	NONE	
DD 257826	A	29-06-1988	DD 257826 A1	29-06-1988